



A simple and convenient way to connect LiteRibbon without soldering. These solderless connectors install with a simple locking clasp, meaning that you can achieve a safe and secure connection without the need for tools.

### QuickLinX 90° Angle

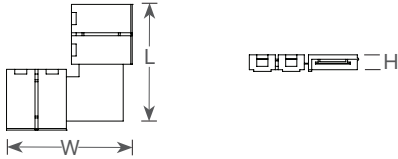


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	1.27 in.	1.34 in.	1.34 in.
<b>Width:</b>	1.27 in.	1.34 in.	1.34 in.
<b>Height:</b>	0.19 in.	0.19 in.	.20 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	3A		

### QuickLinX Tee

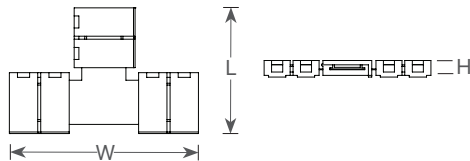


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	1.27 in.	1.34 in.	2.01 in.
<b>Width:</b>	1.93 in.	2.01 in.	1.32 in.
<b>Height:</b>	0.19 in.	0.19 in.	.20 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	3A		

### QuickLinX Cross

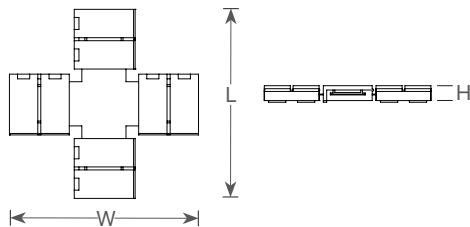


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	1.93 in.	2.01 in.	2.01 in.
<b>Width:</b>	1.93 in.	2.01 in.	2.01 in.
<b>Height:</b>	0.19 in.	0.19 in.	.20 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	3A		

### QuickLinX Coupler

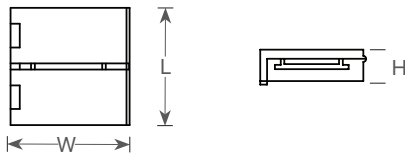


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	0.64 in.	0.64 in.	.65 in.
<b>Width:</b>	0.58 in.	0.65 in.	.65 in.
<b>Height:</b>	0.19 in.	0.19 in.	.20 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	3A		

### QuickLinX Pro Coupler

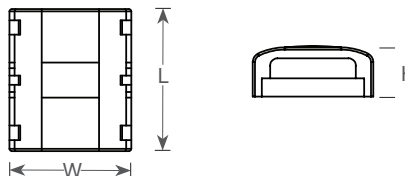


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	0.77 in.	0.77 in.	0.77 in.
<b>Width:</b>	0.57 in.	0.66 in.	0.66 in.
<b>Height:</b>	0.27 in.	0.28 in.	0.28 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	5A		


### QuickLinX Pro to Cable Receiver

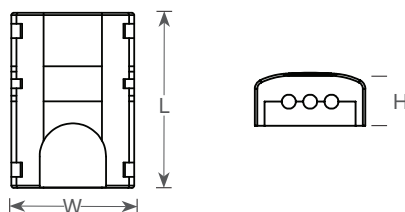

	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	0.95 in.	0.95 in.	0.95 in.
<b>Width:</b>	0.57 in.	0.67 in.	0.67 in.
<b>Height:</b>	0.27 in.	0.28 in.	0.28 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	5A		

**QuickLinX to QuickLinX Cable**


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	7 in.	7 in.	7 in.
<b>Width:</b>	0.58 in.	0.65 in.	0.65 in.
<b>Height:</b>	0.19 in.	0.19 in.	0.20 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	3A		

**QuickLinX to Bare-Ends**


	3-Conductor	5-Conductor	6-Conductor
<b>Length:</b>	6.5 in.	6.5 in.	6.5 in.
<b>Width:</b>	0.58 in.	0.65 in.	0.65 in.
<b>Height:</b>	0.19 in.	0.19 in.	0.20 in.
<b>Voltage:</b>	3VDC-24VDC		
<b>Max Current:</b>	3A		