


LiteRibbon Chroma, 4 in 1, RGB-Daylite, 72, 12V, 5 m is designed specifically for those with an eye on blending color with Daylite. This LiteRibbon variation is 1 row of chroma quality emitters and runs on a 12-volt current. It is available in 5 m lengths. Chroma-Correct is a proprietary LiteRibbon designed specifically for blending color. This custom 4-in-1 chipset is populated with RGB emitters and high-CRI white light. You can achieve several color choices with this variation of LiteRibbon.

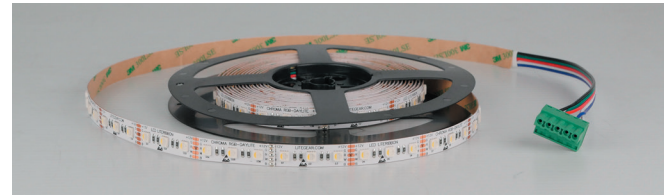

12 SPECIFICATIONS, 12V DC

Product Name: LiteRibbon Chroma, RGB-Daylite, 72, 12V, 5 m

Item Number: LRC-72-X1-RGB.DAY-12-5M

Optical System: Flexible LED tape

Color Name: RGB Daylite

Power: 115W (total potential power per 5 meter roll)

Voltage Input: 12 VDC nominal (8-13.5 VDC constant voltage)

Current: 9.6A (total potential current per 5 meter roll)

CCT: 6250K (+/-250K)

CRI: 94.1 (Daylite)

TLCI: 91 (Daylite)

Beam Angle: 120°

Whites: Luminous Flux (1m): 450 (Daylite)

Colors: Luminous Flux (1m): 140(R) 330(G) 100(B)

Color Space Compliant: No

Green/Magenta: Yes (with appropriate controller)

Weight: 0.27 lb. (123.3 g) per 5 meter roll, including wire lead

PCB Width: 12 mm (0.47 in.)

PCB Length: 5 m (16.4 ft)

Ribbon Overall Thickness: 2 mm (0.08 in.)

Cut Segment Length: 41.7 mm (1.64 in.)

Cut Segments per Meter: 24

Total LED Quantity: 360

LEDs per Meter: 72

LEDs per Cut Segment: 3

LED Spacing: 14 mm (0.55 in.) Center to Center

Dimming Range: 0-100%

Operating Temperature: -10°C to +50°C (14°F to +122°F)

Connector: PH5.F

Mounting: Adhesive backing

LED Lifetime: 50,000 Hrs

IP Rating: 20



Certifications: UL Listed (Canada/US), CE Compliant (Europe)

PHOTOMETRIC DATA

	24 in. FC (spread, in.)	70 cm. Lux (spread, cm.)	36 in. FC (spread, in.)	91 cm. Lux (spread, cm.)	48 in. FC (spread, in.)	122 cm. Lux (spread, cm.)	60 in. FC (spread, in.)	152 cm. Lux (spread, cm.)	72 in. FC (spread, in.)	183 cm. Lux (spread, cm.)
6250K	50 (66 x 65)	535 (168 x 165)	22 (99 x 97)	238 (251 x 246)	12 (132 x 130)	134 (335 x 330)	8 (165 x 162)	86 (419 x 411)	6 (198 x 194)	59 (503 x 493)
Red	17 (61 x 68)	186 (154 x 172)	8 (92 x 102)	83 (233 x 259)	4 (122 x 137)	47 (309 x 348)	3 (153 x 171)	30 (388 x 434)	2 (184 x 205)	21 (467 x 520)
Green	38 (79 x 71)	412 (200 x 180)	17 (119 x 106)	183 (302 x 269)	10 (159 x 142)	103 (403 x 360)	6 (199 x 177)	66 (505 x 449)	4 (239 x 213)	46 (607 x 541)
Blue	9 (83 x 68)	102 (210 x 172)	4 (124 x 102)	45 (314 x 259)	2 (166 x 137)	25 (421 x 347)	2 (207 x 171)	16 (525 x 434)	1 (249 x 205)	11 (632 x 520)

COLOR RENDERING INDEX

DayLite

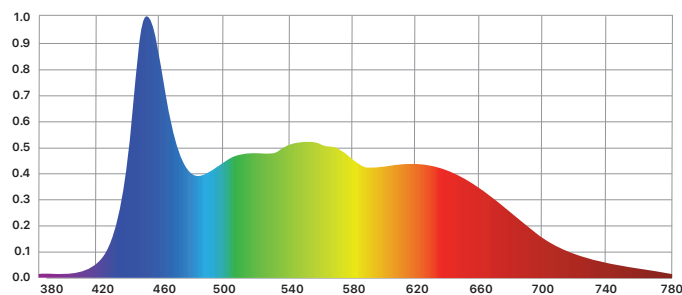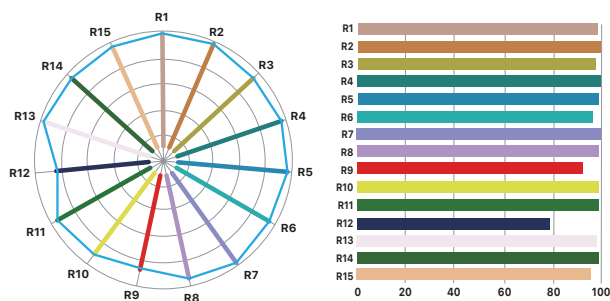

ACCESSORIES

Control

LD-STUDIO-DMX-5X8-V2	LiteDimmer Studio Series 5X8V2
LD-STUDIO-DMX-24x4	LiteDimmer Studio Series, 24X4

Power Supply

PS-12V-250W-F-PL4	Desktop Power Supply, 12V, 250W
-------------------	---------------------------------

Adapter

CA-PL4.M-BE	Male PL4 to Bare-End
-------------	----------------------

14 mm (0.55 in.)

12




12 mm (0.47 in.)

41.7 mm (1.64 in.)

12

2 mm (.08 in.)

12



5 m (196.8 in.)